

FABRICS CATALOGUE

selt 
sun
protection
systems


table of **contents**

awning fabrics	3
solid awning fabrics.....	6
waterproof awning fabrics.....	12
orchestra awning fabrics.....	13
urban / landscape mini awning fabrics.....	14
landscape awning fabrics.....	15
classical / fantasy awning fabrics.....	16
screen fabrics	21
pergola solid fabrics.....	29

awning

fabrics



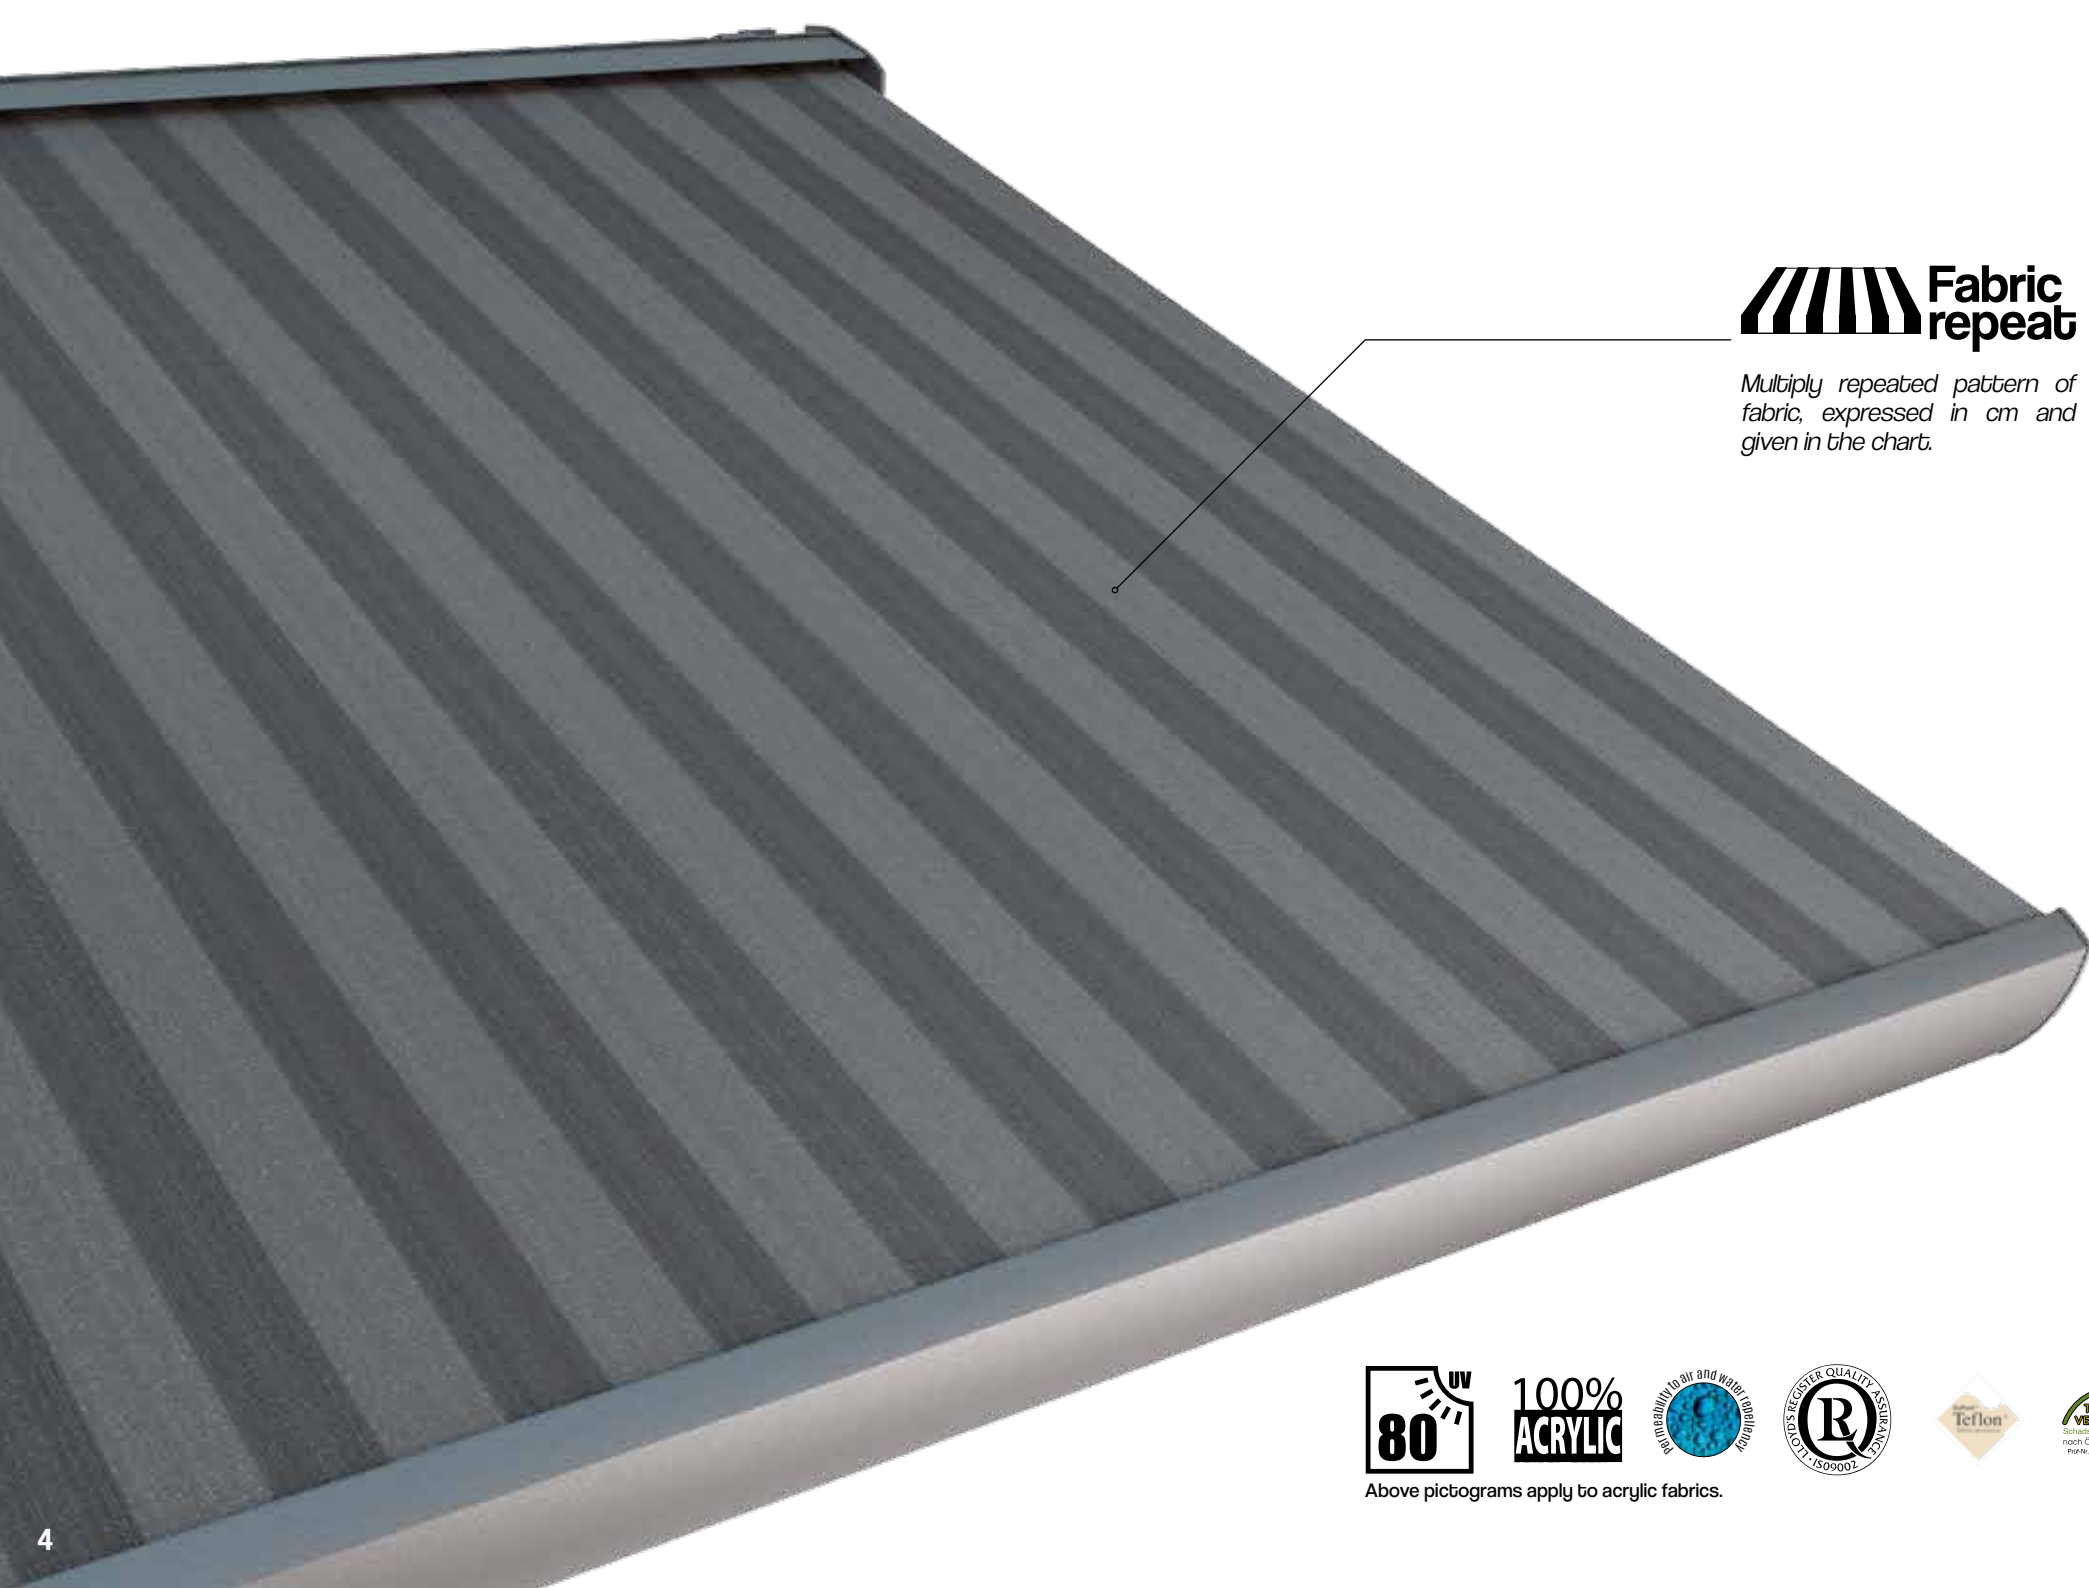

Fabric repeat

Multiply repeated pattern of fabric, expressed in cm and given in the chart.



100%
ACRYLIC



Above pictograms apply to acrylic fabrics.

ACRYLIC FABRICS

Technical data shown below are average values of the current production Die angegebenen technischen Daten sind Durchschnittswerte der laufenden Produktion Les données techniques ci-dessous sont des valeurs moyennes de la production courante		SOLID
Fabric Gewebe Tissu		Acrylic 100%, solution dyed Acryl 100%, spinnlösengefärbt Acrylique 100% teint masse
Finishing Ausrüstung Traitement		Teflon - Cleangard
Weight Gewicht Poids total	DIN EN 12127	~ 300 g/m²
Width Warenbreite Laize		120 cm
Colour fastness Farbächtheit Solidité des coloris	DIN EN ISO 105-B02	7-8 / 8
Oil repellency Ölabweisung Oleofugation	EN ISO 14419	4-5
Water repellency Wasserabweisung Résistance au mouillage superficiel	EN ISO 4920	100
Water column Wassersäule Colonne d'eau	EN 20 811	~ 330 mm
Tensile strength (daN/5 cm) Höchstzugkraft (daN/5 cm) Résistance à la rupture (daN/5 cm)	DIN EN ISO 13934-1	~ 140 / 95
Tear resistance (daN) Weft / Warp Weiterreißkraft (daN) Schuss / Kette Résistance à la déchirure (daN) Trame / Chaîne	EN ISO 13973-2	23 / 4

Acrylic fabrics guarantee the highest quality of the product, providing thermal comfort and protection against UV radiation. Made 100% out of acrylic fibre, dyed in chemical solution, provide excellent protection against colour loss. UV resistance coefficient is 7-8 at 8° scale. Impregnation with use of TEFLON® or SCOTCHGARD™ agents provides an excellent protective barrier and strengthens water-repellent qualities of the fabric, also preventing dirt adhering. Resistance to leaking: 330 mm water column. The advantage of acrylic fabric is also high resistance to tensile and tear. Permeability to air and water repellency Above pictograms apply to acrylic fabrics.

WATERPROOF FABRICS

Technical data shown below are average values of the current production Die angegebenen technischen Daten sind Durchschnittswerte der laufenden Produktion Les données techniques ci-dessous sont des valeurs moyennes de la production courante		WATERPROOF
Fabric Gewebe Tissu		Acrylic 100%, solution dyed Acryl 100%, spinnlösengefärbt Acrylique 100% teint masse
Finishing Ausrüstung Traitement		Teflon - Cleangard
Weight Gewicht Poids total	DIN EN 12127	~ 330 g/m²
Width Warenbreite Laize		120 cm
Colour fastness Farbächtheit Solidité des coloris	DIN EN ISO 105-B02	7-8 / 8
Oil repellency Ölabweisung Oleofugation	EN ISO 14419	4-5
Water repellency Wasserabweisung Résistance au mouillage superficiel	EN ISO 4920	100
Water column Wassersäule Colonne d'eau	EN 20 811	~ 1000 mm
Tensile strength (daN/5 cm) Höchstzugkraft (daN/5 cm) Résistance à la rupture (daN/5 cm)	DIN EN ISO 13934-1	~ 140 / 95
Tear resistance (daN) Weft / Warp Weiterreißkraft (daN) Schuss / Kette Résistance à la déchirure (daN) Trame / Chaîne	EN ISO 13973-2	3 / 4

Waterproof acrylic fabrics are characterized by increased resistance to leaking - more than 800 mm water column. Weave structure together with modern impregnation technology provides high air permeability even on hot days. Oeko-Tex® guarantees that offered acrylic fabrics, subjected to special impregnation for water resistance, are not toxic.

SOLID



BLANCO




2042

UV: 97% G_{tot}: 18%



NATURAL



2929

UV: 97% G_{tot}: 18%




MARFIL



2143

UV: 97% G_{tot}: 16%



SIROCO



2226

UV: 98% G_{tot}: 12%



VANILLA



2687

UV: 97% G_{tot}: 17%




**AMBER
BEIGE**



0814

UV: 99% G_{tot}: 15.66%



BEIGE



2038

UV: 99% G_{tot}: 11%



INTEGRAL



2838

UV: 99% G_{tot}: 8%



AVENA



2296

UV: 98% G_{tot}: 11%




MINERAL



2831

UV: 99% G_{tot}: 7%




MARBLE



0923

UV: 99% G_{tot}: 12.8%



**MULTICO
FLAME**



7131

UV: 90% G_{tot}: 17%




**NUAGES
FLAME**



6319

UV: 90% G_{tot}: 16%



**TWEED
ROCK**



7151

UV: 98% G_{tot}: 11%



CAFE



2316

UV: 99% G_{tot}: 5%




BERNA



2041

UV: 97% G_{tot}: 16%



**TWEED
LATTE**



7926

UV: 98% G_{tot}: 15%




VISION



2250

UV: 99% G_{tot}: 7%




**CHAUME
PIGUE**



U235

UV: 100% G_{tot}: 9%




IRON



0937

UV: 99% G_{tot}: 6.57%



**TWEED
BROWN**



0403

UV: 99% G_{tot}: 6.82%




**LIN
MELANGE**



8904

UV: 95% G_{tot}: 11%



SNOWFLAKE



3463

UV: 95% G_{tot}: 22%




**TWEED
ARGENT**



0794

UV: 98% G_{tot}: 19%

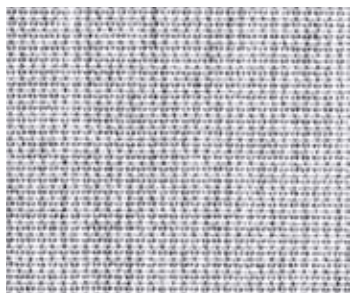

**DARK
LINEN**



6727

UV: 98% G_{tot}: 18%



**SILVER
WHITE**



0364

UV: 99% G_{tot}: 7.67%




SILVER



2821

UV: 97% G_{tot}: 13%

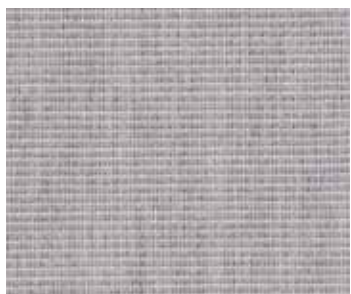


**SILVER
GREY**



U190

UV: 90% G_{tot}: 15%



**SILVER
MELANGE**



0028

UV: 99% G_{tot}: 7.36%



**STITCH
ANDESITE**



0512

UV: 98% G_{tot}: 8%



PERLA



2979

UV: 97% G_{tot}: 8%




**PIETRA
BEIGE**



9415

UV: 98% G_{tot}: 8%




ZINC




5802

UV: 99% G_{tot}: 11%

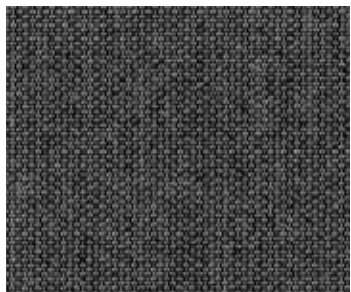

ASH



0638

UV: 99% G_{tot}: 5.05%



ANTRACITA



8488

UV: 99% G_{tot}: 6%



**EBONY
TWEED**



7324

UV: 98% G_{tot}: 10%



NEGRO



2170

UV: 99% G_{tot}: 5%



**GRAPHITE
ZIP**



1524

UV: 98% G_{tot}: 12%



BASALT



8203

UV: 100% G_{tot}: 5%




FLANELLE



U104

UV: 100% G_{tot}: 5%




**CHARCOAL
TWEED**



0402

UV: 99% G_{tot}: 5%



**ZIP
GREY**



1597

UV: 98% G_{tot}: 13%




**STITCH
CALCITE**



0505

UV: 98% G_{tot}: 9%




PLATINUM



0715

UV: 90% G_{tot}: 12%




**WHITE
LINEN**



8615

UV: 95% G_{tot}: 18%

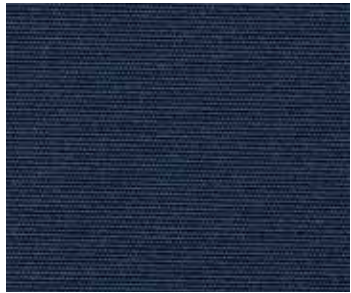

BREEZE



2777

UV: 99% G_{tot}: 6%



AZUL



2018

UV: 99% G_{tot}: 7%



MARINE



2145

UV: 99% G_{tot}: 5%



**PIMENT
PIGUE**



U412

UV: 100% G_{tot}: 10%



**BRIGHT
RED**



2211

UV: 99% G_{tot}: 10%



RIOJA



2210

UV: 99% G_{tot}: 8%



**CARMIN
PIGUE**



U411

UV: 100% G_{tot}: 10%



**SWITCH
ROGUE**



U390

UV: 100% G_{tot}: 8%



GRANATE




2101

UV: 99% G_{tot}: 6%



**STITCH
RUBY**



0507

UV: 98% G_{tot}: 9%



**MARSEILLE
FLAME**



8854

UV: 100% G_{tot}: 11%




AMARILLO



2013


UV: 99% G_{tot}: 15%

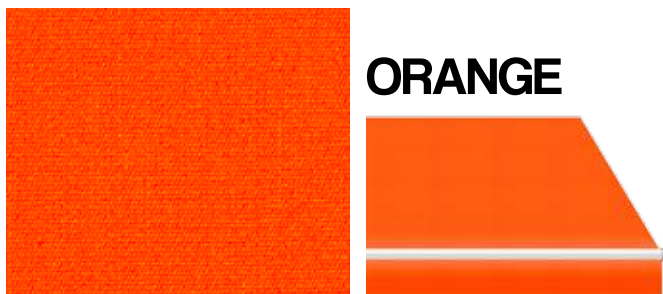

ORANGE

2050

UV: 99% G_{tot}: 13%



**TWEED
SENAPE**

0034


UV: 99% G_{tot}: 6.3%



CURRY

U105

UV: 100% G_{tot}: 12%

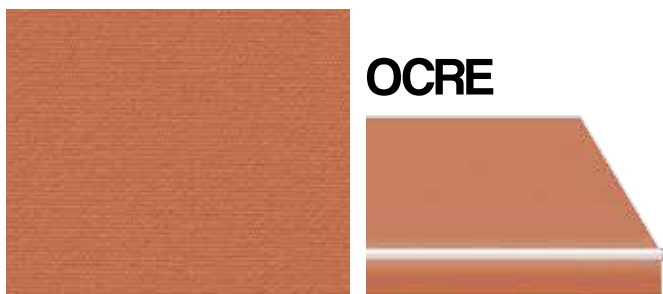

OCRE

2180

UV: 99% G_{tot}: 13%



**POTIRON
PIGUE**

U413


UV: 100% G_{tot}: 10%



**MELEZE
PIGUE**

U417

UV: 100% G_{tot}: 8%

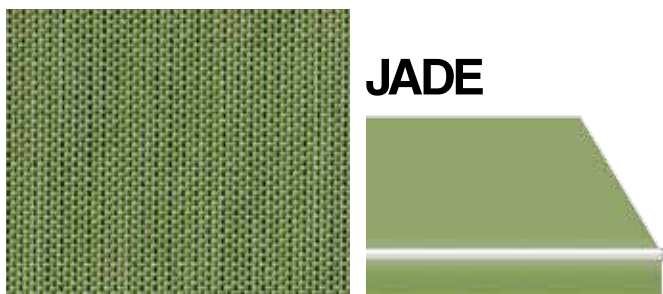

JADE

0396

UV: 99% G_{tot}: 8.12%



**VERDE
BOTELLA**

2245

UV: 99% G_{tot}: 6%



**SWITCH
EMPIRE**

U393

UV: 100% G_{tot}: 8%

WATERPROOF




BLANCO



8268

UV: 97% G_{tot}: 18%



MARFIL



8272

UV: 97% G_{tot}: 16%



AMARILLO



8265

UV: 99% G_{tot}: 15%



COCO



2047

UV: 99% G_{tot}: 9%



GRIS



8271

UV: 99% G_{tot}: 7%



ANTRACITA



2796

UV: 99% G_{tot}: 6%



**TWEED
NEGRO**



2085

UV: 99% G_{tot}: 6%




NEGRO



8275

UV: 99% G_{tot}: 5%

ORCHESTRA




**NAPLES
LINEN**



D307

UV: 95% G_{tot}: 13%

REPEAT: 20 cm



**NAPLES
HEATHER**



D305

UV: 90% G_{tot}: 11%

REPEAT: 20 cm



**NAPLES
STONE**



D113

UV: 95% G_{tot}: 7%

REPEAT: 20 cm



**NAPLES
LIGHT GREY**



D304

UV: 90% G_{tot}: 11%

REPEAT: 20 cm




**PENCIL
BEIGE**




D324

UV: 95% G_{tot}: 14%

REPEAT: 30 cm




**PENCIL
DARK GREY**



D319

UV: 100% G_{tot}: 8%

REPEAT: 30 cm



**PENCIL
GREY**



D320

UV: 95% G_{tot}: 14%

REPEAT: 30 cm



**PENCIL
YELLOW**



D323

UV: 95% G_{tot}: 13%

REPEAT: 30 cm



**WIDE CHINA
GREEN**



D299

UV: 95% G_{tot}: 10%

REPEAT: 60 cm



**WIDE CHINA
BEIGE**




D301

UV: 95% G_{tot}: 12%

REPEAT: 60 cm



**WIDE CHINA
YELLOW**




D300

UV: 95% G_{tot}: 13%

REPEAT: 60 cm

URBAN




CANDLELIGHT



0990

UV: 99% G_{tot}: 14% REPEAT: 6 cm




LANTERN



0991

UV: 99% G_{tot}: 14.2% REPEAT: 6 cm




CONCRETE



0993

UV: 99% G_{tot}: 10.8% REPEAT: 6 cm



TIMBER



0992

UV: 99% G_{tot}: 9.6% REPEAT: 6 cm

LANDSCAPE MINI




LAVA



4623

UV: 99% G_{tot}: 8.3% REPEAT: 2 cm




CLAY



4627

UV: 99% G_{tot}: 11.3% REPEAT: 2 cm




SAND




4620

UV: 99% G_{tot}: 11.4% REPEAT: 2 cm



GRAVEL



4621

UV: 99% G_{tot}: 8.1% REPEAT: 2 cm

LANDSCAPE



BEACH



4662

UV: 99% G_{tot}: 16.37% REPEAT: 24 cm



ROSOPSIDA



4657

UV: 99% G_{tot}: 14.96% REPEAT: 24 cm



GOBI



4658

UV: 99% G_{tot}: 11.32% REPEAT: 24 cm



**SAHARA
DUST**



4639

UV: 99% G_{tot}: 10.18% REPEAT: 24 cm



NAMIB



4640

UV: 99% G_{tot}: 5.04% REPEAT: 24 cm



FJORD



4644

UV: 99% G_{tot}: 7.8% REPEAT: 24 cm



CLIFFS




4643

UV: 99% G_{tot}: 6.78% REPEAT: 24 cm



LADAKH



4655

UV: 99% G_{tot}: 5.91% REPEAT: 24 cm



VULCANO



4665

UV: 99% G_{tot}: 5% REPEAT: 24 cm

CLASSICAL



CLASSICAL
GRIS

2103

UV: 97% G_{tot}: 16% REPEAT: 20 cm



CLASSICAL
STONE TWEED

0597


UV: 98% G_{tot}: 12% REPEAT: 20 cm



CLASSICAL
MOSSY TWEED

9878


UV: 98% G_{tot}: 15% REPEAT: 20 cm

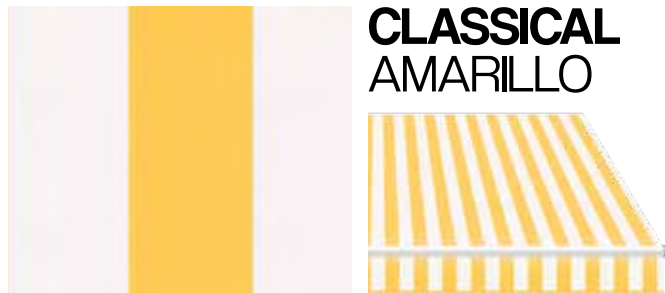

CLASSICAL
AMARILLO

2015

UV: 97% G_{tot}: 15% REPEAT: 20 cm

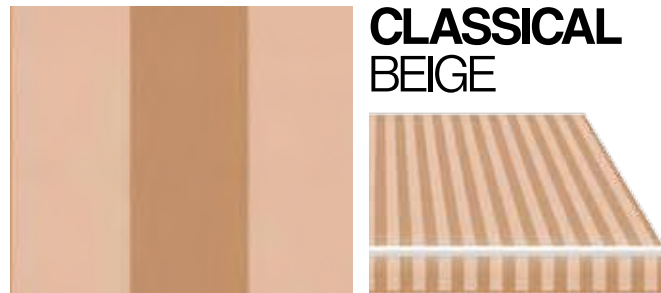

CLASSICAL
BEIGE

2275

UV: 98% G_{tot}: 14% REPEAT: 20 cm



CLASSICAL
MARRON BEIGE

2148

UV: 99% G_{tot}: 9% REPEAT: 20 cm


FANTASY



MILANO

3868

UV: 95% G_{tot}: 22% REPEAT: 30 cm

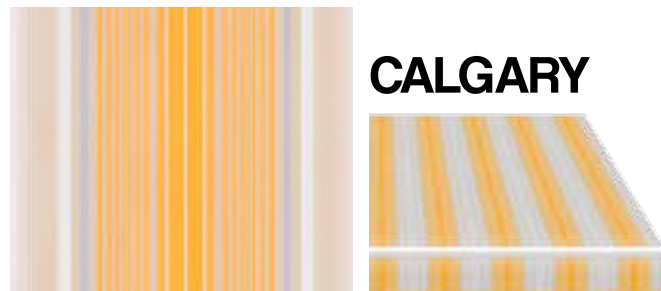

CALGARY

6712

UV: 95% G_{tot}: 16% REPEAT: 30 cm



SUNRISE

0180

UV: 99% G_{tot}: 14.73% REPEAT: 30 cm



PALERMO



3605

UV: 90% G_{tot}: 21% REPEAT: 17 cm



ARGENTINA



2016

UV: 98% G_{tot}: 15% REPEAT: 30 cm



TARANTO




3672

UV: 95% G_{tot}: 21% REPEAT: 24 cm




CANBERRA



0452

UV: 99% G_{tot}: 15.51% REPEAT: 24 cm




**LISBONNE
NATURE**



8224

UV: 95% G_{tot}: 13% REPEAT: 30 cm



DAKAR



2080

UV: 98% G_{tot}: 15% REPEAT: 40 cm




SALERNO



3861

UV: 90% G_{tot}: 20% REPEAT: 30 cm



ALBERTA



5106

UV: 98% G_{tot}: 15% REPEAT: 30 cm



MANCHESTER



2823

UV: 98% G_{tot}: 8% REPEAT: 24 cm



SUNBURY




6106

UV: 98% G_{tot}: 10% REPEAT: 30 cm




**HARDELOT
NATURE**



8935

UV: 95% G_{tot}: 14% REPEAT: 30 cm




**SIENNE
NATURE**



D100

UV: 95% G_{tot}: 14% REPEAT: 30 cm

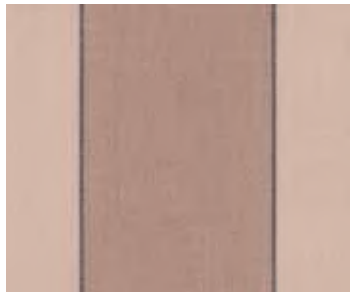


TEXAS



2238

UV: 98% G_{tot}: 13% REPEAT: 30 cm



PERU



2201

UV: 98% G_{tot}: 14% REPEAT: 30 cm



ANDRIA



3881

UV: 95% G_{tot}: 18% REPEAT: 30 cm



MARTE



2121

UV: 99% G_{tot}: 11% REPEAT: 24 cm



BOLOGNA



3427

UV: 90% G_{tot}: 22% REPEAT: 20 cm




JAMAICA



2701

UV: 98% G_{tot}: 14% REPEAT: 30 cm

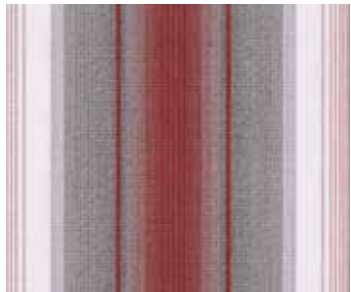


BRISBANE



0186

UV: 98.1% G_{tot}: 10.26% REPEAT: 24 cm



EDMONTON



6711

UV: 98% G_{tot}: 13% REPEAT: 30 cm




**OSLO
FIRE**



7351

UV: 95% G_{tot}: 14% REPEAT: 30 cm

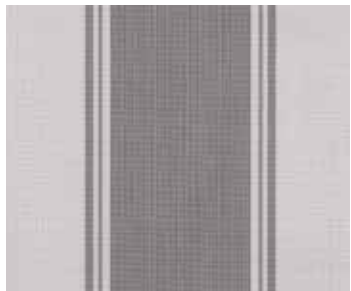

WINTONE




0734

UV: 98% G_{tot}: 12.39% REPEAT: 24 cm




FOGGIA




3864

UV: 95% G_{tot}: 18% REPEAT: 30 cm

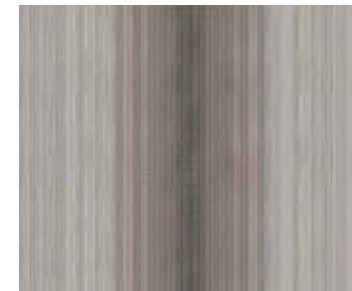

**BROKEN
HILL**




0497

UV: 95% G_{tot}: 16% REPEAT: 30 cm



**NEW
YORK**




2174

UV: 98% G_{tot}: 14% REPEAT: 30 cm



METROPOLITAN



3608

UV: 99% G_{tot}: 7% REPEAT: 30 cm



GLADSTONE



0493

UV: 99% G_{tot}: 7.78% REPEAT: 24 cm



**SIENNE
STONE**



8931

UV: 95% G_{tot}: 13% REPEAT: 30 cm



ANCONA



3746

UV: 90% G_{tot}: 19% REPEAT: 24 cm



PADOVA



3875

UV: 95% G_{tot}: 17% REPEAT: 30 cm



RAVENNA



3882

UV: 95% G_{tot}: 18% REPEAT: 30 cm



FIRENZE



3889

UV: 90% G_{tot}: 20% REPEAT: 30 cm



MELBOURNE



0054

UV: 99% G_{tot}: 11.74% REPEAT: 24 cm



ORLANDO



2191

UV: 98% G_{tot}: 11% REPEAT: 30 cm




CANADA



2061

UV: 99% G_{tot}: 8% REPEAT: 30 cm



PLUTON





2179

UV: 99% G_{tot}: 10% REPEAT: 24 cm

Screen

fabrics

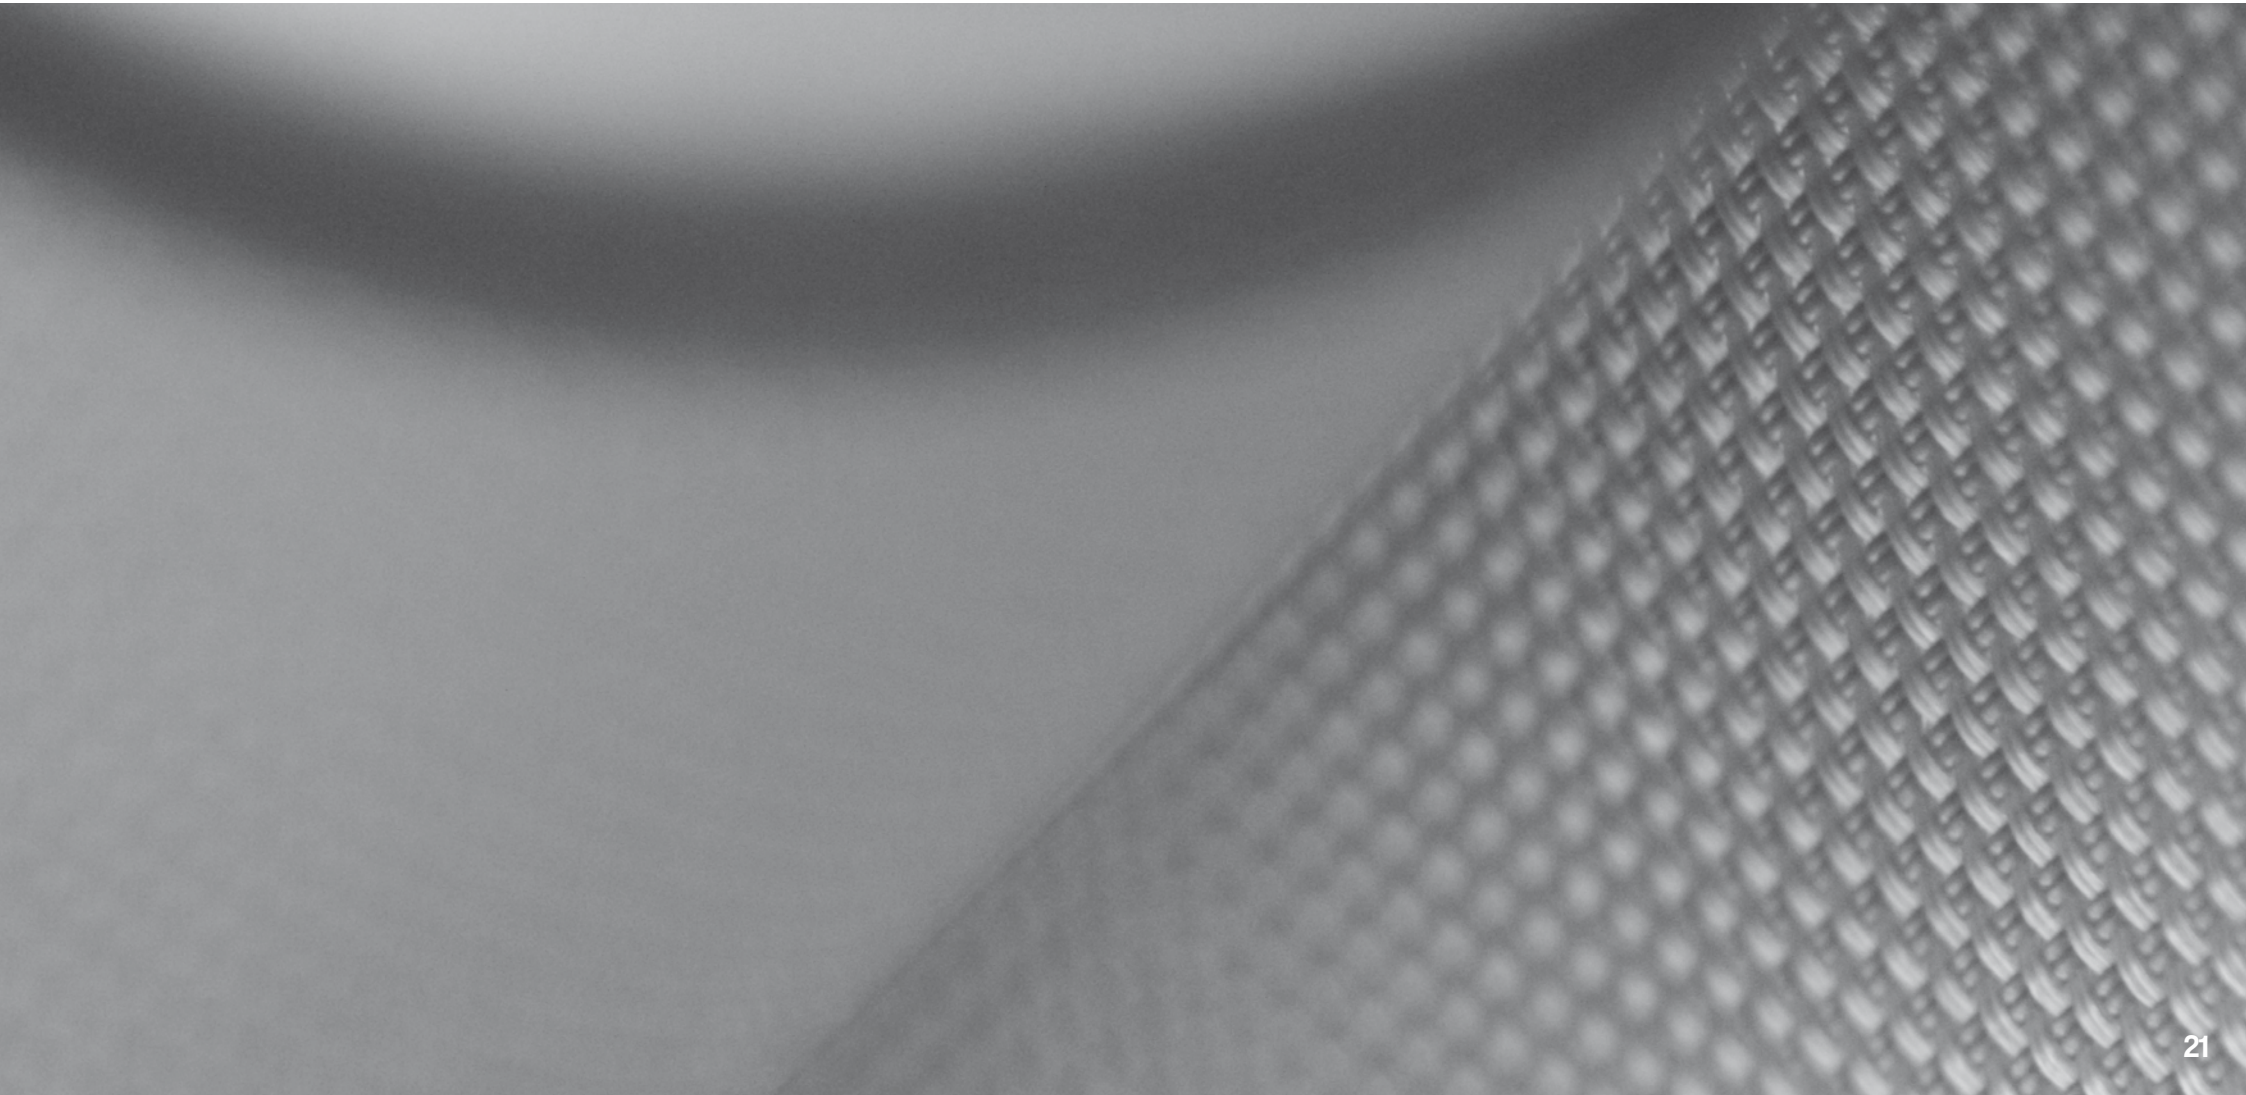

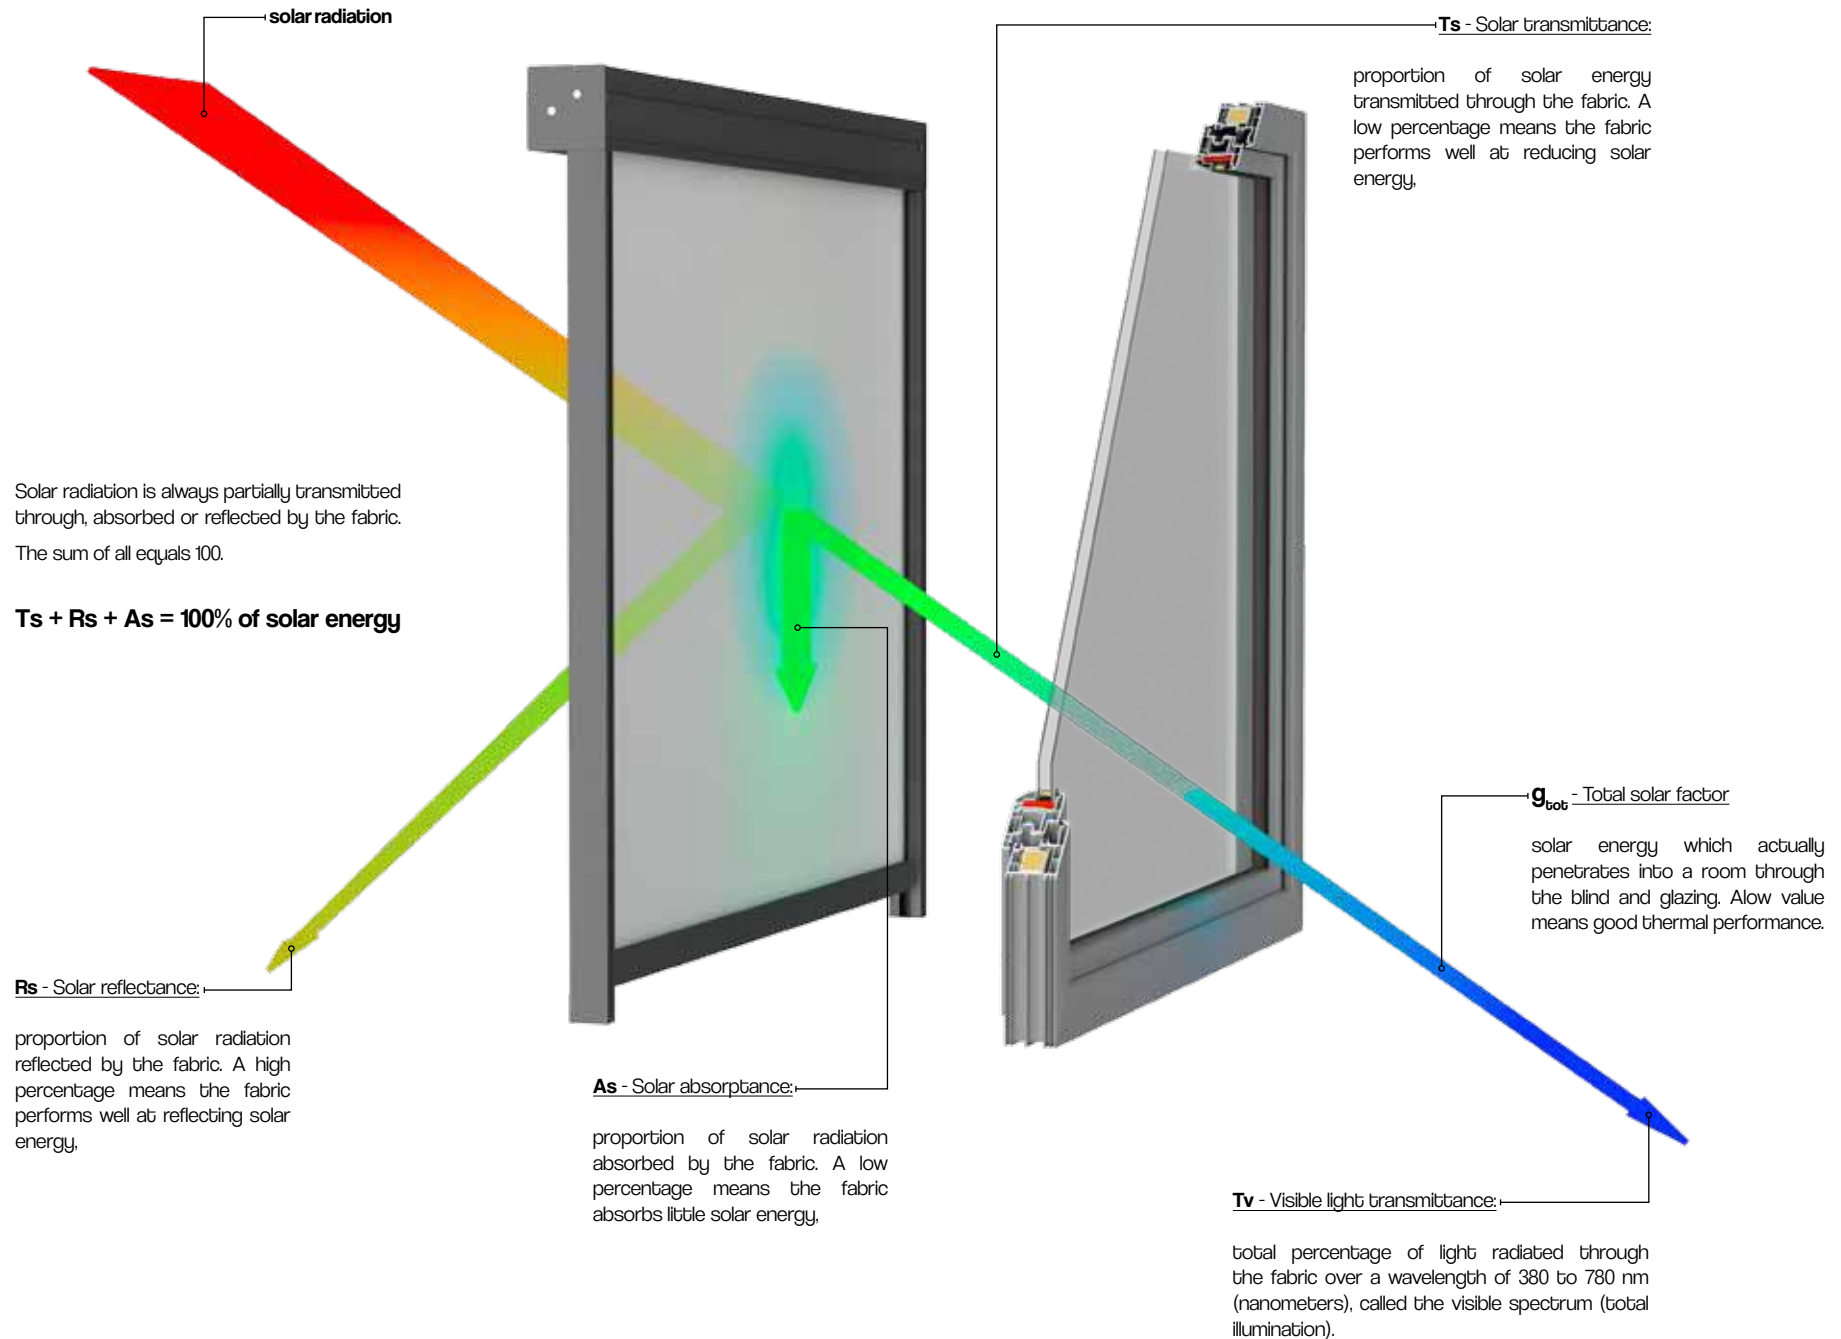



OPENNES FACTOR:

Relative area of the openings in the fabric. It is considered as independent of the colour. For fabric with the same weave, it should be measured using the darkest colour in the range

SOLTIS 92 / SOLTIS 99

Polyester technical fabric coated with PVC, manufactured with patented technology Precontraint Ferrari®. The unique technology gives fabric high stability and protects it against deformations even in large size blinds. High technical parameters guarantee optical and thermal comfort. The quality components used in production of this fabric ensures color fastness. Thanks to the smooth surface, the fabric is difficult to absorb dirt or get stained.

SUNWORKER

Smooth polyester fabric finished with PVC. Unique structure of the fabric effectively stops the sunlight, allowing for just optimal amount of visible light to transmit inside the room, providing high comfort to its users. The advantages of this fabric are: color fastness, high resistance to weather conditions and easy to maintain clean.

POLYSCREEN

Wide group of technical polyester fabrics coated with PVC, characterized by variety of weaving patterns and properties (PS Luminous, PS 550, PS 350). This allows architects to select the right solution, increasing visual attractiveness of the building and to emphasize its individual character. High technical parameters provide optical and thermal comfort inside the room. An additional feature of the fabric is the ease to keep it clean.

BLACK OUT

High-end blackout fabrics in group of Polyscreen 314 BO, effectively block sunlight coming into the room. It is ideal solution for conference rooms, audio-visual, photographic studios, etc. High dimensional stability, high technical parameters and interesting colours are without a doubt advantages of fabrics in this group.

ACOUSTIC - VEROGLIM

Elegant fabric, made from the highest quality non-flammable polyester fibers Trevira® CS, intended for indoor use. Because of its weight, the fabric is ideally suited for cassette systems. An important advantage of this fabric is high coefficient of acoustics. Thanks to its structure, the fabric absorbs sound and mutes the room. Another advantage is metallic surface that reflects bright light and in this way regulates its intensity in the room.

SERGE 100 / SERGE 600

Collection of fabrics made from fiberglass covered with PVC. Fabrics made of this group have a distinctive diagonal „serge” weave, which guarantees them an unusual dimensional stability. High fire resistance and very good technical parameters of fabrics provide users with visual comfort in rooms, thus protecting against overheating the interior.

The pictures are presented for illustration purpose only, differences in tones are permissible. Any difference in tone does not constitute grounds for complaint.

	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	light fastness grey scale level EN ISO 4892	openness factor [%]	internal method				application
							TS [%]	RS [%]	AS [%]	TV [%]	
Ash (Ebony Grey)	85% PVC + 15% PES	610 ± 5%	078 ± 5%	8 / 8	5 / 5	5	6	7	87	6	interior / exterior
Pearl-Grey				8 / 8	5 / 5		11	29	60	9	
White-Grey				8 / 8	5 / 5		13	37	50	12	
White-Pearl				8 / 8	5 / 5		16	57	27	12	
Pearl-Sand				8 / 8	5 / 5		13	37	50	12	
Pearl-Linen				8 / 8	5 / 5		17	46	37	12	
White-Linen				8 / 8	5 / 5		20	63	17	16	
White				7 / 8	4 / 5		19	69	12	15	

Tearing resistance (daN) UNE EN ISO 13937-3:2001 - Warp: 6.6, Weft: 5.3
 Breaking strength (daN/5cm) UNE EN ISO 13934-1:1999 - Warp: 174, Weft: 133
 Stretch (%) UNE EN ISO 13934-1:1999 - Warp: 22%, Weft: 21%
 Flame retardant - certificate on request



0338



	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	light fastness grey scale level EN ISO 4892	openness factor [%]	internal method				application
							TS [%]	RS [%]	AS [%]	TV [%]	
Gold-Ebony	85% PVC + 15% PES	610 ± 5%	078	8 / 8	5 / 5	5	11	8	81	10	interior / exterior
Gold-Crystal							18	17	65	22	
Gold-Linen							13	25	62	14	

Tearing resistance (daN) UNE EN ISO 13937-3:2001 - Warp: 6.6, Weft: 5.3
 Breaking strength (daN/5cm) UNE EN ISO 13934-1:1999 - Warp: 174, Weft: 133
 Stretch (%) UNE EN ISO 13934-1:1999 - Warp: 22%, Weft: 21%
 Flame retardant - certificate on request



0338



	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	light fastness grey scale level EN ISO 4892	openness factor [%]	internal method				application
							TS [%]	RS [%]	AS [%]	TV [%]	
Silver-Bronze	85% PVC + 15% PES	610 ± 5%	078	8 / 8	5 / 5	5	17	14	69	17	interior / exterior
Silver-Grey							16	17	67	17	
Silver-Silver							21	23	56	22	

Tearing resistance (daN) UNE EN ISO 13937-3:2001 - Warp: 6.6, Weft: 5.3
 Breaking strength (daN/5cm) UNE EN ISO 13934-1:1999 - Warp: 174, Weft: 133
 Stretch (%) UNE EN ISO 13934-1:1999 - Warp: 22%, Weft: 21%
 Flame retardant - certificate on request



0338



POLYSCREEN® 550

POLYSCREEN® 550 GOLD

POLYSCREEN® 550 SILVER

ASH (EBONY GREY)



10550017

PEARL SAND




10550023

PEARL GREY



10550013

PEARL LINEN



10550021

WHITE GREY




10550012

WHITE LINEN




10550019

WHITE PEARL



10550011

WHITE



10550009

GOLD EBONY



10550051

GOLD CRYSTAL



10550052

GOLD LINEN



10550053

SILVER BRONZE



10550041

SILVER GREY



10550042

SILVER SILVER



10550043

	composition	weight [g/m ²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	light fastness grey scale level EN ISO 4892	openness factor [%]	internal method				application
Ash (Ebony Grey)	80% PVC + 20% PES	400 ± 5%	0,53 ± 5%	8 / 8	5 / 5	10	TS [%]	RS [%]	AS [%]	TV [%]	interior / exterior
Pearl-Grey							16	26	58	14	
White-Linen							27	58	15	23	
White							25	64	11	22	

Tearing resistance (daN) UNE EN ISO 13937-3:2001 - Warp: 4,8, Weft: 5,2
Breaking strength (daN/5cm) UNE EN ISO 13934-1:1999 - Warp: 145, Weft: 127
Stretch (%) UNE EN ISO 13934-1:1999 - Warp: 21%, Weft: 23%
Flame retardant - certificate on request



0338

POLYSCREEN® 350

	composition	weight [g/m ²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	light fastness grey scale level EN ISO 4892	openness factor [%]	internal method				application
Arizona	85% PVC + 15% PES	511 ± 5%	0,78	8 / 8	5 / 5	13	TS [%]	RS [%]	AS [%]	TV [%]	interior / exterior
Sahara A		612 ± 5%	0,82			6	10	15	75	11	
Sahara B		612 ± 5%	0,82			6	10	12	78	10	
Kalahari		555 ± 5%	0,80			7	23	23	54	23	
Atacama		594 ± 5%	0,77			10	20	14	66	22	
Mojave		516 ± 5%	0,90			11	14	8	78	14	

Tearing resistance (daN) UNE EN ISO 13937-3:2001 - Warp: 5,4, Weft: 6,4
Breaking strength (daN/5cm) UNE EN ISO 13934-1:1999 - Warp: 110,3, Weft: 100,9
Stretch (%) UNE EN ISO 13934-1:1999 - Warp: 23,2%, Weft: 20%
Flame retardant - certificate on request



0338

POLYSCREEN®
LUMINOUS

	composition	weight [g/m ²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	light fastness grey scale level EN ISO 4892	openness factor [%]	internal method				application
Coupage 1	85% PVC + 15% PES	610 ± 5%	0,78	8 / 8	5 / 5	5	TS [%]	RS [%]	AS [%]	TV [%]	interior / exterior
Coupage 2							10	8	82	10	
Coupage 3							12	13	75	12	
Coupage 4							20	21	59	19	
							17	16	67	17	


Tearing resistance (daN) UNE EN ISO 13937-3:2001 - Warp: 6,6, Weft: 5,3
Breaking strength (daN/5cm) UNE EN ISO 13934-1:1999 - Warp: 174, Weft: 133
Stretch (%) UNE EN ISO 13934-1:1999 - Warp: 22%, Weft: 21%
Flame retardant - certificate on request



0338

POLYSCREEN® 550
COUPAGE

ASH (EBONY GREY)



10350017

PEARL GREY



10350013

WHITE LINEN



10350019

WHITE




10350009

ARIZONA



10550061

SAHARA A



10550063

SAHARA B




10550062

KALAHARI



10550064

ATACAMA




10550065

MOJAVE




10550066

COUPAGE 1




10550031

COUPAGE 2




10550032

COUPAGE 3



10550033

COUPAGE 4



10550034

	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	light fastness grey scale level EN ISO 4892	openness fac- tor [%]	EN 14501				application interior / exterior
Ebony Grey	80% PVC + 20% PES coated with PVC	610 ± 5%	0,66 ± 5%	8 / 8	4 / 5	0	TS [%]	RS [%]	AS [%]	TV [%]	
Ebony Linen							0	36	64	0	
Linen Bronze							0	36	64	0	
Linen Sand							0	36	64	0	
Ebony Sand							0	36	64	0	
Tearing resistance (daN) UNE EN ISO 13937-3:2001 - Warp: 4.4, Weft: 2.5 Breaking strength (daN/5cm) UNE EN ISO 13934-1:1999 - Warp: 147, Weft: 91 Stretch (%) UNE EN ISO 13934-1:1999 - Warp: 26.7%, Weft: 17.6% Flame retardant - certificate on request											




POLYSCREEN® 314 BLACK OUT

EBONY GREY



10314B20

EBONY LINEN



10314B08

LINEN BRONZE



10314B06

LINEN SAND



10314B04

EBONY SAND



10314B10

	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	openness factor [%]	EN 14501				application
						TS [%]	RS [%]	AS [%]	TV [%]	interior / exterior
White-White 02002	42% glassfibre + 58% pvc	535	0,55	>7	5	21/21	65,9/66,3	13,2/12,7	21,2/21,2	
Grey-White 01002						67/67	37,2/26,9	56,2/66,4	6,6/6,6	
Pearl-Grey 07007						101/101	38,3/39,4	51,7/50,5	8,4/8,4	
Grey-Grey 01001						3,5/3,5	151/151	81,3/81,4	3,6/3,6	
Grey-Charcoal 01010						3,6/3,6	9,9/12,6	86,5/83,8	3,6/3,6	
Charcoal-Charcoal 10010						3,6/3,6	50/48	91,4/91,6	3,6/3,6	
Tearing resistance (daN) UNE EN ISO 4674-1 method 2 - Warp: 8,5, Weft: 7,5 Breaking strength (daN/5cm) UNE EN ISO 1421 - Warp: 260, Weft: 225 Flame retardant - certificate on request										




SERGE 600

WHITE WHITE




60002002

GREY WHITE



60001002

PEARL GREY




60007007

GREY GREY



60001001

GREY CHARCOAL



60001010

CHARCOAL CHARCOAL



60010010

	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	openness factor [%]	EN 14501				application
						TS [%]	RS [%]	AS [%]	TV [%]	interior / exterior
White-White 02002	42% glassfibre + 58% pvc	620	0,8	>7	1	12,8	71,3	15,9	12,9	
Grey-White 01002						22	44,8 / 31,2	53 / 66,6	2	
Pearl-Grey 07007						28	36,9	60,3	21	
Grey-Grey 01001						2,4	17,4	80,2	2,2	
Grey-Charcoal 01010						12	10,5 / 1,4	88,3 / 84,8	12	
Charcoal-Charcoal 10010						11	5,9	9,3	11	
Tearing resistance (daN) UNE EN ISO 4674-1 method 2 - Warp: 5,9, Weft: 6,2 Breaking strength (daN/5cm) UNE EN ISO 1421 - Warp: 321, Weft: 277 Flame retardant - certificate on request										



SERGE 100

WHITE WHITE




61002002

GREY WHITE



61001002

PEARL GREY



61007007

GREY GREY



61001001

GREY CHARCOAL



61001010

CHARCOAL CHARCOAL



61010010

	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	light fastness gray scale level EN ISO 105 B04	openness factor [%]	EN 14501				application
							TS [%]	RS [%]	AS [%]	TV [%]	
White SWK005	Polyester / PVC	320	0.42	6 / 8	3-4 / 5	6	23	66	11	21	interior / exterior
Iron SWK653						6	12	35	53	10	
Champagne SWK711						6	21	50	29	18	
Charcoal SWK392						6	6	7	87	6	
Tearing strength (daN/5cm) DIN 53.363 - Warp: 43, Weft: 22											
Tensile strength (daN/5cm) NF EN ISO 13934-1 - Warp: 220, Weft: 150											
Flame retardant - certificate on request											

SUNWORKER



SYSTEM
LOWICK

CLASSIFIED
5
years

	composition	weight [g/m²]	thickness [mm]	light fastness grey scale level EN ISO 105 B04	openness factor [%]	EN 14501				application
	Polyester / PVC	420	0.45		4	TS [%]	RS [%]	AS [%]	TV [%]	interior / exterior
Charcoal 2047				5 / 5		5	8	87	5	
Concrete 2167				5 / 5		3	19	78	3	
Glossy 2065				4 / 5		10	46	44	7	
Silver 2048				2 / 5		8	46	46	8	
Silver-Black 2045				5 / 5		3	35	62	3	
Silver-White 2051				4 / 5, 3 / 5		10 / 9	50 / 70	40 / 21	10 / 9	
Sandy Beige 2135				5 / 5		9	46	45	6	
White 2044				2 / 5		20	70	10	19	
Tear strength (daN) DIN 53363 - Warp: 45, Weft: 20 Tensile strength (daN/5cm) EN ISO 1421 - Warp: 310, Weft: 210 Flame retardant - certificate on request										

SOLITS® 92



GREENGUARD
v. 10

	composition	weight [g/m²]	thickness [mm]	light fastness grey scale level EN ISO 105 B04	openness factor [%]	EN 14501				application
	Polyester / PVC	290	0.32		3	TS [%]	RS [%]	AS [%]	TV [%]	interior
White 2055				4 / 5, 4 / 5		9 / 9	50 / 69	41 / 22	8	
Quartz 50285				4 / 5, 5 / 5		9 / 9	47 / 60	44 / 31	8	
Sandy Beige 50286				4 / 5, 5 / 5		7 / 7	44 / 45	49 / 48	6	
Spume 50284				4 / 5, 4 / 5		9 / 9	48 / 63	43 / 28	7	
Light Grey 2058				4 / 5, 5 / 5		7 / 7	47 / 45	46 / 48	6	
Alu 2059				4 / 5, 4 / 5		4	47	49	3	
Antracite 2068				4 / 5, 5 / 5		3 / 3	36 / 9	61 / 88	2	
Tear strength (daN) DIN 53363 - Warp: 11, Weft: 13 Tensile strength (daN/5cm) EN ISO 1421 - Warp: 160, Weft: 170 Flame retardant - certificate on request										

SOLITS® 99




GREENGUARD
v. 10

WHITE



40SWK005

IRON



40SWK653

CHAMPAGNE



40SWK711

CHARCOAL



40SWK392

CHARCOAL



50922047

CONCRETE



50922167

GLOSSY




50922065

SILVER



50922048

SILVER BLACK



50922045

SILVER WHITE



50922051

SANDY BEIGE



50922135

WHITE



50922044

WHITE



50992055

QUARTZ




509950285

SANDY BEIGE



509950286

SPUME



509950284

LIGHT GREY




50992058

ALU



50992059

ANTRACITE



50992068

	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	openness factor [%]	DIN EN 410				application
						TS [%]	FS [%]	AS [%]	TV [%]	
Grey-Silver 115	Trevira CS	220	0.43	5-6 / 8	1	5	50	45	2	Interior
Light Grey-Silver 114						5	52	43	4	
White-Silver 111						7	52	41	7	
Ivory-Silver 113						6	49	45	6	
Flame retardant - certificate on request										

VEROGLIM
ACOUSTIC



$\alpha_w = 60\%$



GREY SILVER



34022115

LIGHT GREY SILVER



34022114

WHITE SILVER



34022111


IVORY SILVER



34022113

pergola Solid

fabrics

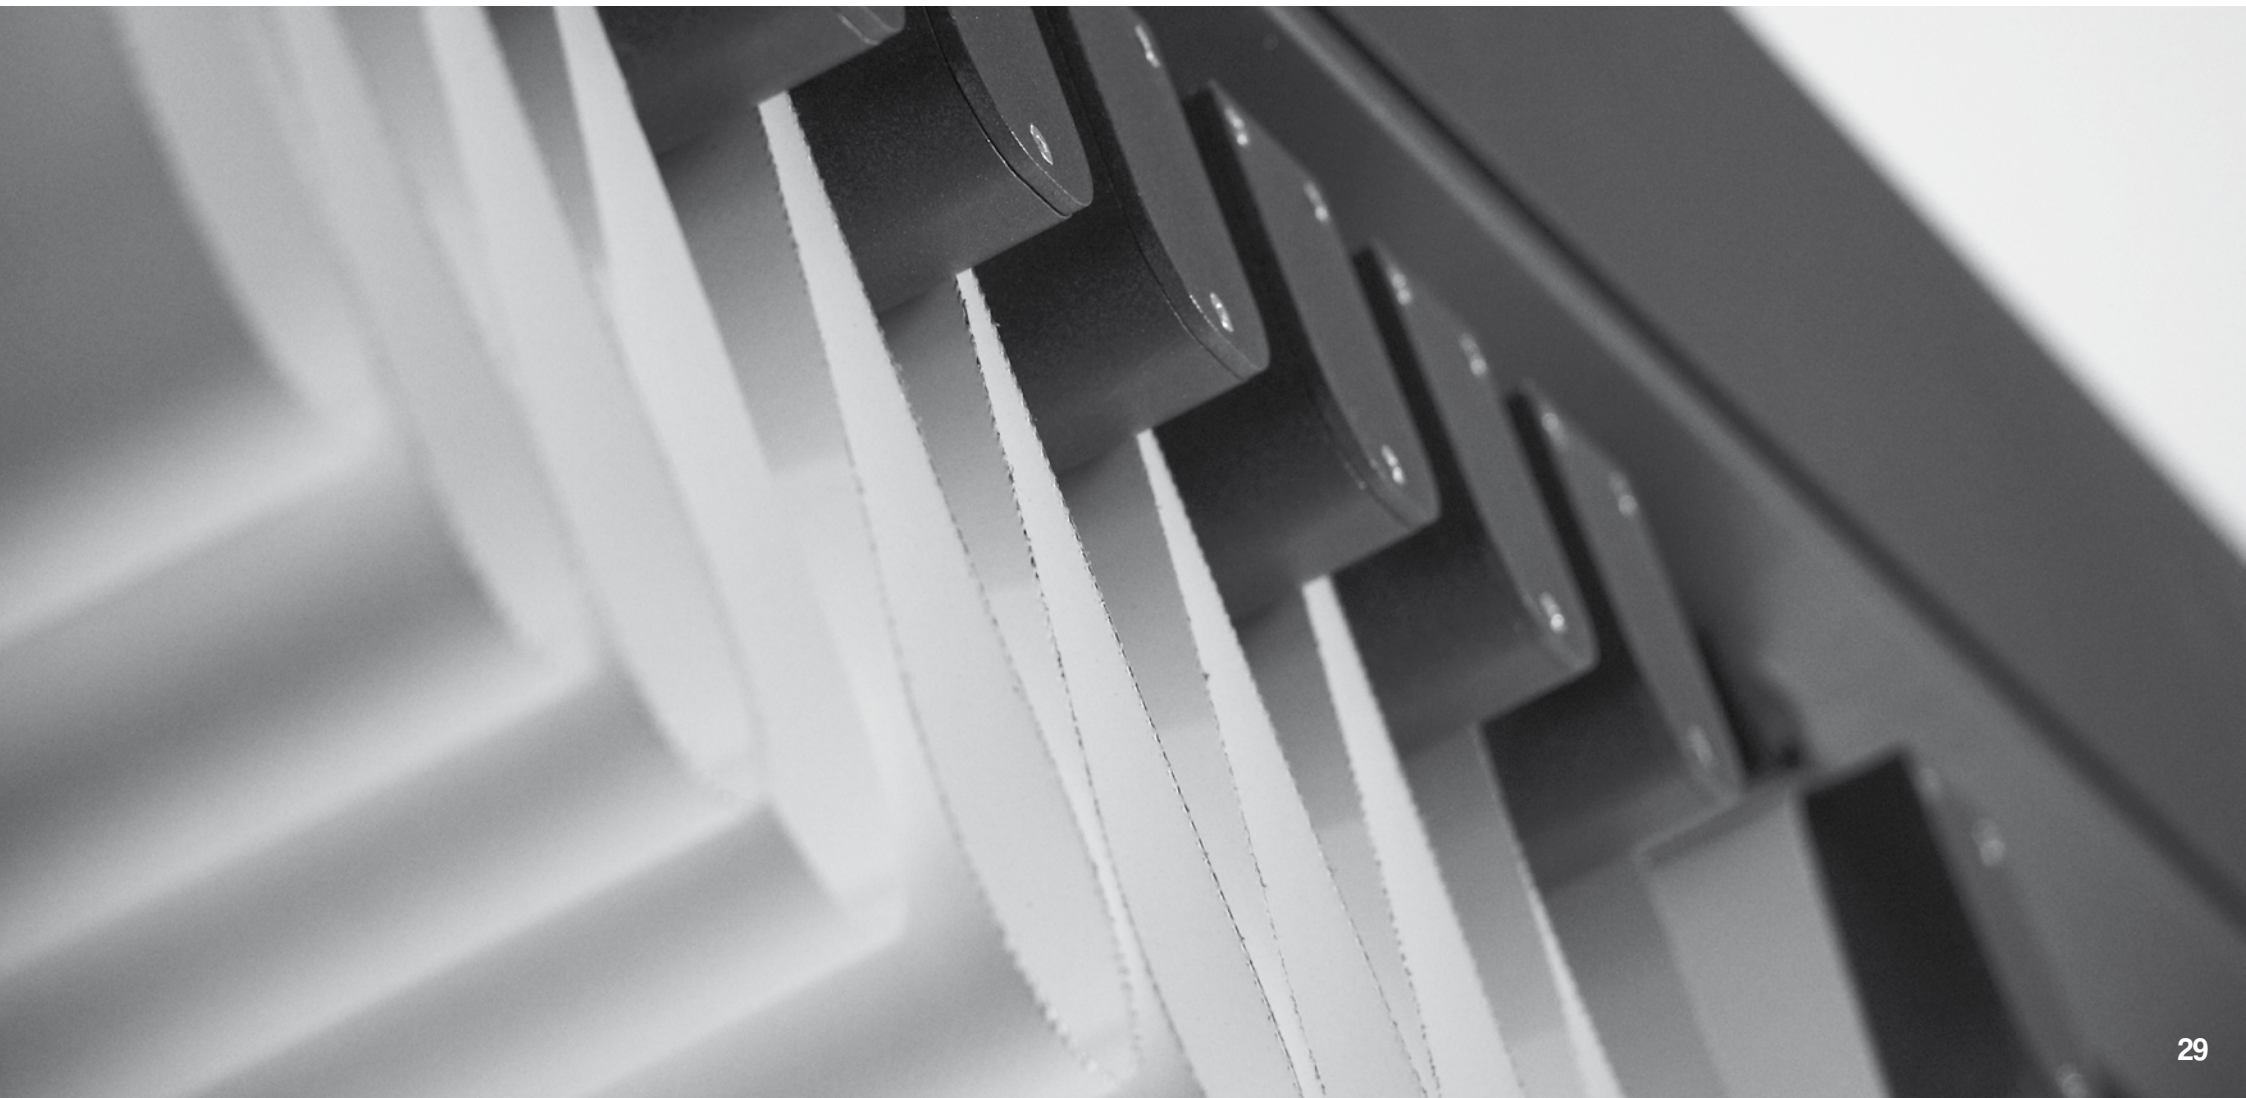

pergola Solid fabrics

Precontraint 602 Opaque

Technical specifications

	Values	Standards
Yarn	1100 dtex PES HT	Tersuisse
Weight	750 g/m ²	EN ISO 2286-2
Width	267 cm	-
Tensile strength (warp/weft)	230/220 daN/5cm	EN ISO 1421
Tear strength (warp/weft)	20/20 daN	DIN 53363
Elongation under load (warp/weft)	<1%/<1%	NF EN 15619
Adhesion	9/9 daN/5cm	EN ISO 2411
Finish	Varnish both sides	-
Flame retardancy	• M2/NFP 92-507 • B1/DIN4102-1 • M2/UNE23727-90 • BS 7837 • 1530.3/AS NZS • Method 2/NFPA 701 • CSFM T19 •	
Cold resistance	-30°C	ISO 4675
Heat resistance	+70°C	

BLANC
602N Opaque
8503

BEIGE
602N Opaque
0020

Precontraint 702 Opaque

Technical specifications

	Values	Standards
Yarn	1100 dtex PES HT	Tersuisse
Weight	830 g/m ²	EN ISO 2286-2
Width	267 cm	
Tensile strength (warp/weft)	280/280 daN/5 cm	EN ISO 1421
Tear strength (warp/weft)	30/28 daN	DIN 53363
Adhesion	10/10 daN/5 cm	EN ISO 2411
Finish	Acrylic varnish both sides Aluminium face / Back grey	
Flame retardancy	M2/NFP 92-507 • TEST 2/NFPA 701 • CSFM T19 • B1/DIN 4102-1 • BS 7837 • GROUP 1/AS/NZS 3837 • 1530.3/AS/NZS • SITAC/SIS 650082 • Schwerbrennbar Q1-Tr1/ONORM A 3800-1 • CLASSE 2/UNI 9177-87 • M2/UNE 23727-90 • VKF 5.2/SN 198898 • B-s2,do/EN 13501-1	
Cold resistance	-30°C	
Heat resistance	+70°C	






ALU GREY
702 Opaque
1285

pergola Solid fabrics

Expansion

Technical specifications

	Values	Standards
Composition	Composite of 75% Mass dyed Acrylic + 25% PVC transparent membrane	
Weight	420 g/m ²	ISO 3801
Width	300 cm	EN 1773
Thickness	0.6 mm	ISO 2286-3
Tensile strength (warp/weft)	140/115 daN	ISO 13934-1
Elongation at break (warp/weft)	28/15 %	ISO 13934-1
Adhesion	2.6/21 daN/5 cm	ISO 2411
Resistance to water penetration (Schmerber)	>10000 mm	ISO 811
Resistance to surface wetting (spray test)	class 5 / 5	ISO 4920
Oil repellency	class 4 / 8	ISO 14419
Oil repellency (membrane side)	class 5 / 8	ISO 14419
Finish	Cleanguard Treatment anti stain and waterproof	
Colour fastness UV - outdoor	class 4 / 5	ISO 105 B04

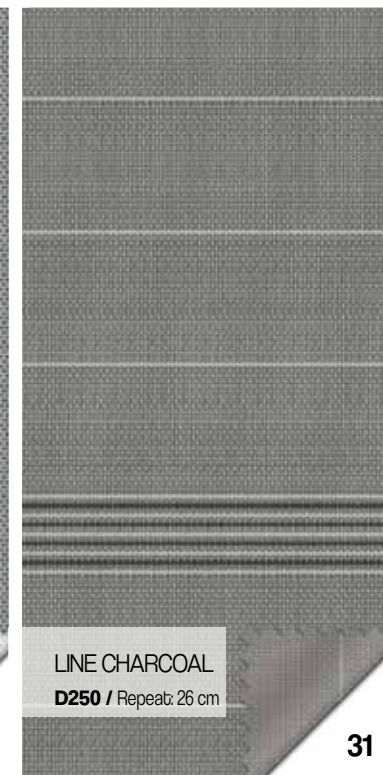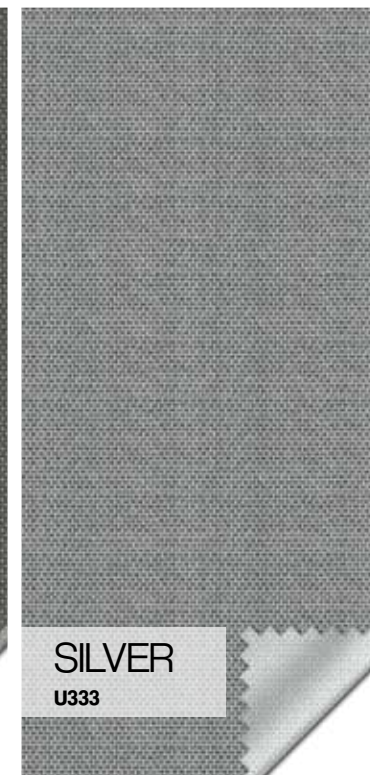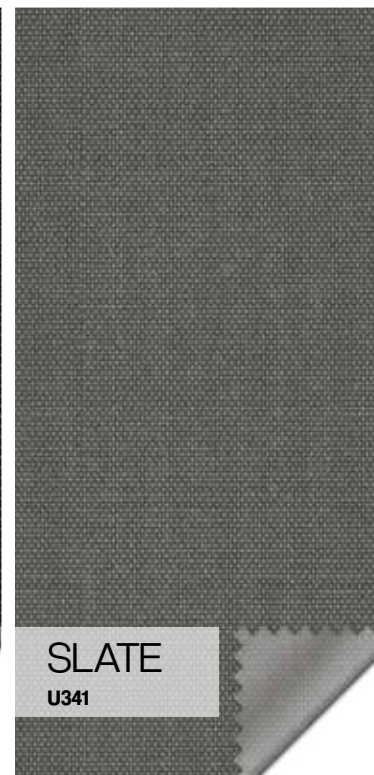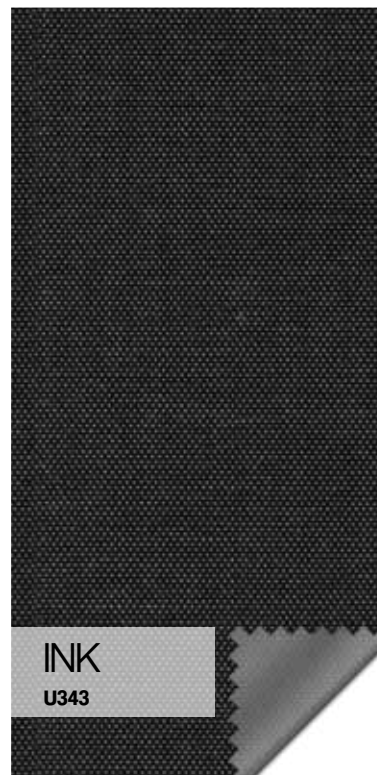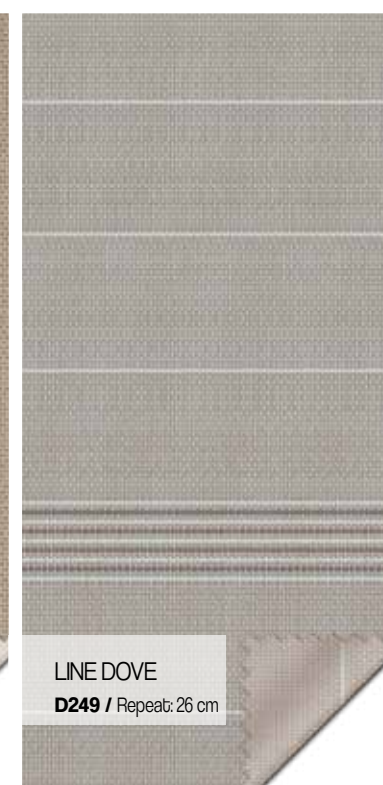

FABRICS CATALOGUE

All specifications, design and color of products are up to date at time of forwarding this catalogue to print.
The manufacturer reserves the right to make changes without prior notice.
Due to the printing process any color reproductions are for illustration purposes only,
their deviation from the actual color cannot constitute grounds for complaint.
Folder reproduction in whole or in part is forbidden without the written permission of SELT.

www.selt.com